


# STRIATED

## Insulated Metal Panel


The TrueCore Striated Wall Panel is the modern economical way to mimic the beauty and high-end appearance of an architectural flat wall panel. The virtually flat exterior face has narrowly spaced mini-ribs that add strength and allow for a more economical lighter gauge exterior facing than that of a typical flat wall panel. TrueCore Striated Wall Panels are ideal for exterior walls on all types of commercial and industrial buildings, including those in the distribution, processing, manufacturing, pharmaceutical, automotive, and aviation markets.

Expertly crafted by industry veterans, you can rely on TrueCore's Striated Wall Panel for trouble-free construction and energy efficient building operation.

### SIDE JOINT



### PANEL PROFILE AND CROSS SECTION

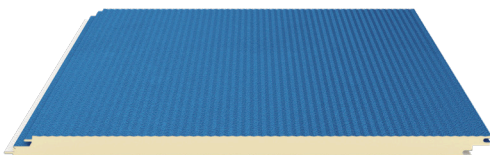

<b>EXTERIOR PROFILE &amp; TEXTURE</b>	Striated profile with non-directional stucco embossing
<b>INTERIOR PROFILE &amp; TEXTURE</b>	Mesa profile with non-directional stucco embossing or smooth surface texture
<b>EXTERIOR FACINGS</b>	24, 22 Ga. G-90 galvanized steel or AZ50 aluminum coated steel
<b>INTERIOR FACINGS</b>	26, 24, 22 Ga. G-90 galvanized steel or AZ50 aluminum coated steel 26, 24 Ga. 304L and 316L stainless steel with 2B finish
<b>EXTERIOR COATINGS</b>	Siliconized Polyester (SMP) Fluoropolymer (PVDF) Flurothane* II, IV, V
<b>INTERIOR COATINGS</b>	Polyester Silicone Polyester (SP) Fluoropolymer (PVDF) Flurothane* II, IV, V PVC Plastisol
<b>WIDTH</b>	40", 36"
<b>LENGTH</b>	8'-0" to 40'-0" standard <i>Contact TrueCore for information and pricing on longer lengths.</i>
<b>THICKNESS</b>	2", 2.5", 3", 4"
<b>CORE</b>	Foamed-in-place Class 1 rated polyisocyanurate
<b>JOINT</b>	Double Tongue and Groove for concealed fastening
<b>R-VALUE</b>	R-8 per inch of thickness (nominal)

*\*Flurothane is a registered trademark of The Sherwin-Williams Company*